



2.1 TECHNICAL PROPERTIES

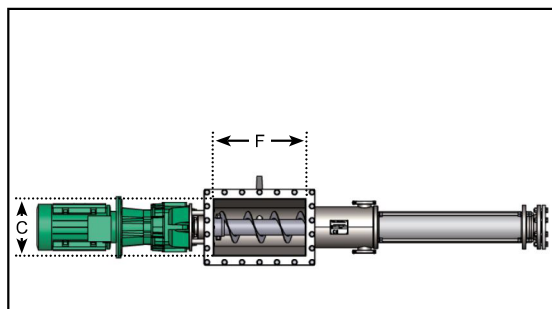

mm (inch)		PHT 400			PHT 800
		401-09	401-20	401-32	801-37
A	=	2316 (91,2)			2829 (111,4)
B	=	500 (19,7)			582 (22,9)
C	=	330 (13)			467 (18,4)
D	=	DN125			
E	=	80 (3,1)			100 (3,9)
F	=	527 (20,7)			714 (28,1)

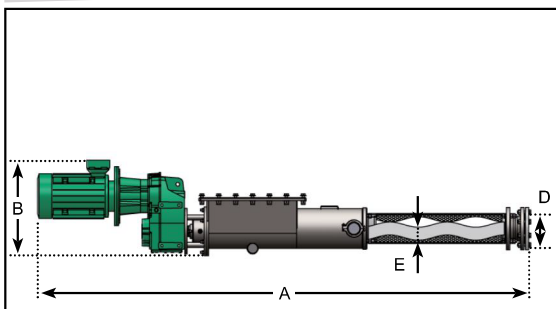

PHT 400	401-09	250 (551)	Kg (lb)	9	T/h	5-13	T/h	32A 3P+T 400V / 50Hz	7,5 kW
	401-20			20		12-28			
	401-32			32					
PHT 800	801-37	405 (893)	Kg (lb)	37	T/h	22-52	T/h		11 kW



+/- 2%

